

The diagram illustrates a network architecture with three main components connected to a common network:

- Host Server:** Contains a dashed box separating "Network services (e.g. ARP and DHCP)" from "device driver software" and "NIC card".
- Computer System (Left):** Contains "OS network software", "device driver software", and "NIC card". An arrow points from "OS network software" to the network line, labeled "communication messages and Data".
- Computer System (Right):** Contains "device driver software" and "NIC card".
- Network:** A horizontal line at the bottom labeled "'always connected' type network".

Arrows indicate the flow of communication between the Host Server, the two Computer Systems, and the network.

Figure 1B
PRIOR ART

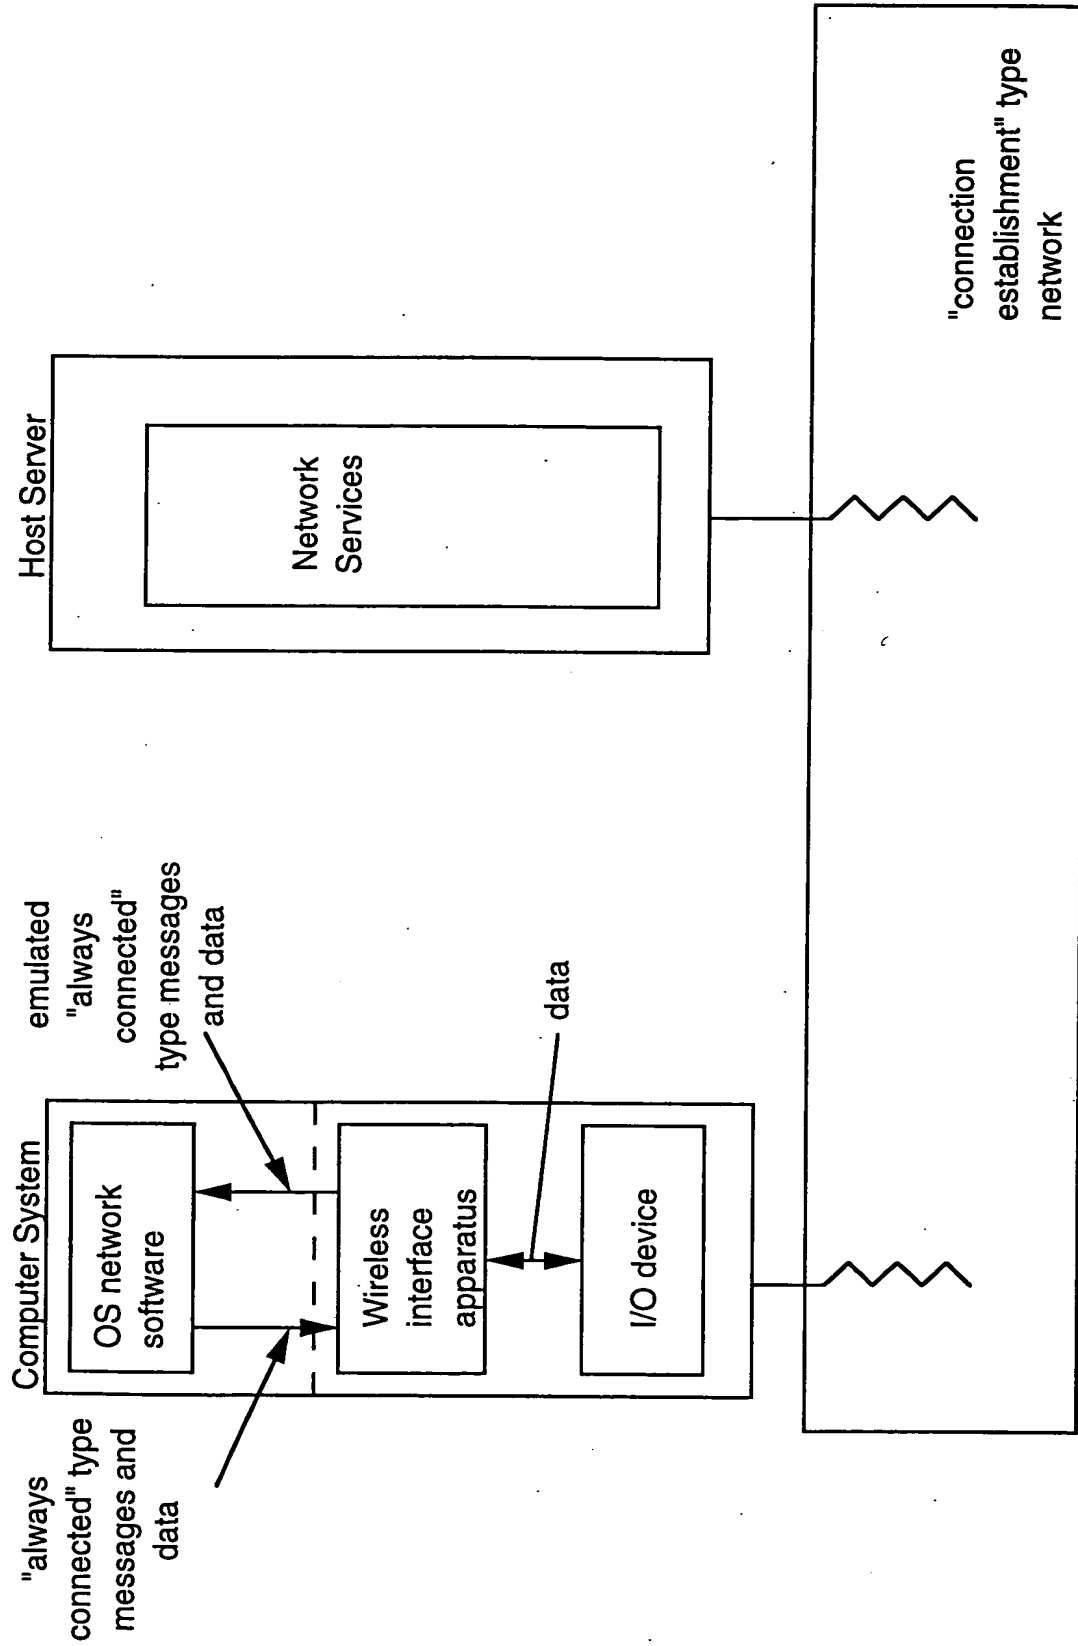


Figure 2

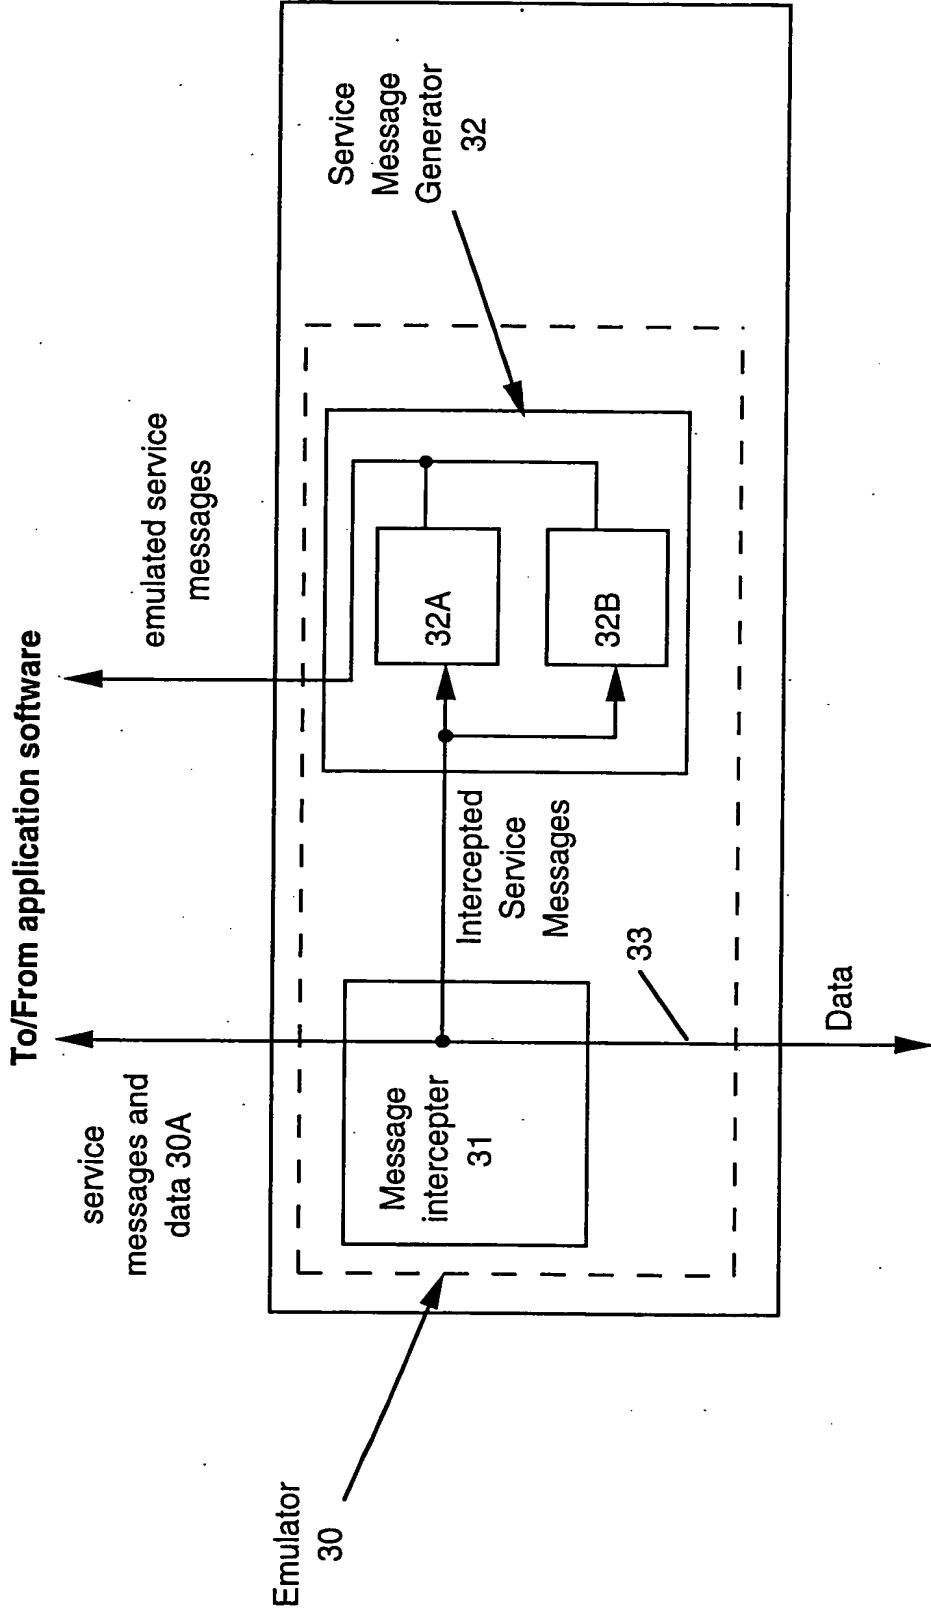


Figure 3

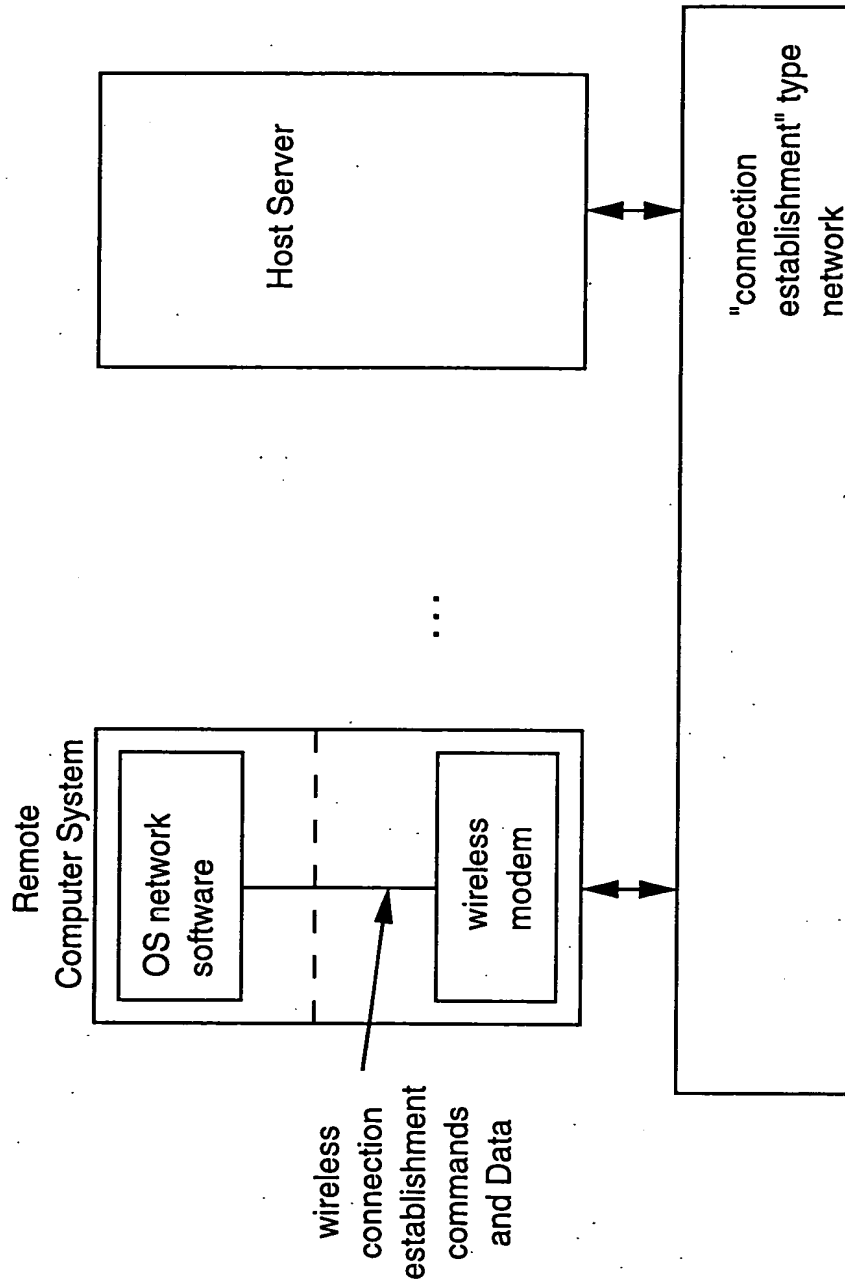


Figure 1A
PRIOR ART